



Website



Instagram

SM Maquinaria

37 Ave 3-13 Zona 7 Col. El Rodeo

502.2315.8408

502.2315.8409

info@smmaquinaria.com
www.smmaquinaria.com

JACK
China No.1

Shanghai stock
listed

JK-8740C

Bending arm type four needle six thread attaching sewing machine


- Spring-type presser foot structure, wide fabric adaptability
- Sealed design of machine head, no oil trouble
- Standard automatic presser foot lifter, high efficiency
- Small cylinder with 150mm circumference, which is smoother for sewing




JK-8740C

Bending arm type four needle six thread
attaching sewing machine


It is suitable for the sewing of sports underwear, swimwear, children's clothing, baby clothes, diving suits, yoga pants and other sewing products

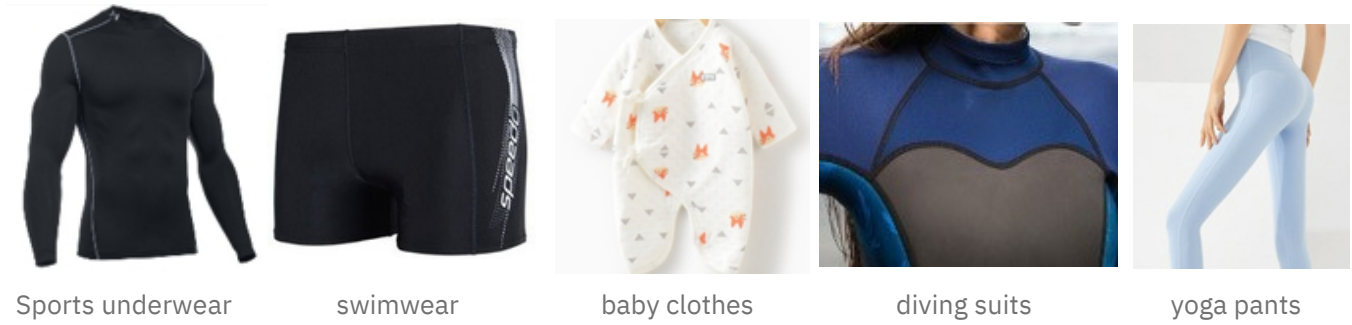


This is the basic model for bending arm type four needle six thread attaching sewing machine. Optional AW rubbish suction device for smoother swing and more beautiful stitches.

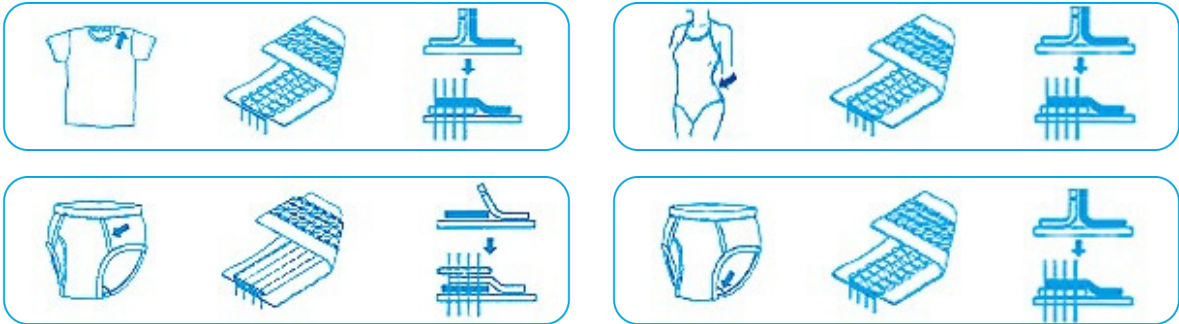


Spring-type presser foot structure, wide fabric adaptability

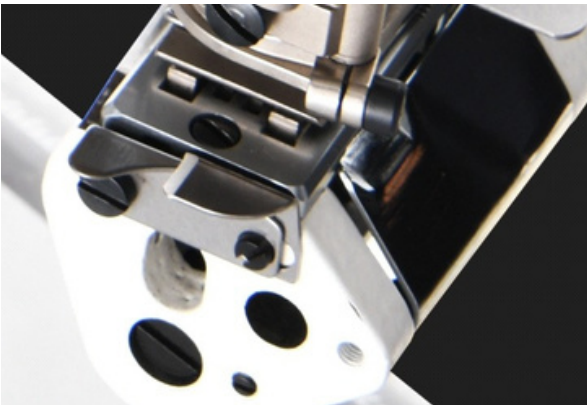

Sealed design of machine head, no oil trouble

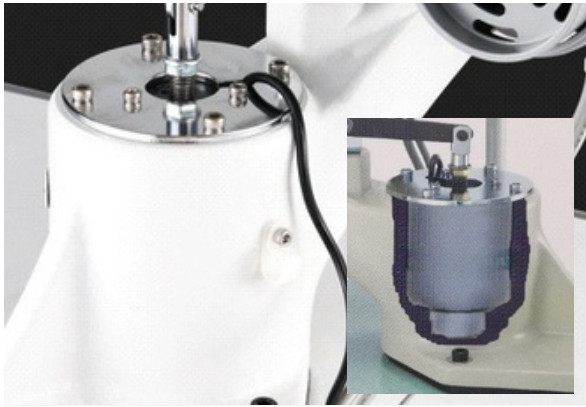

Standard automatic presser foot lifter, high efficiency

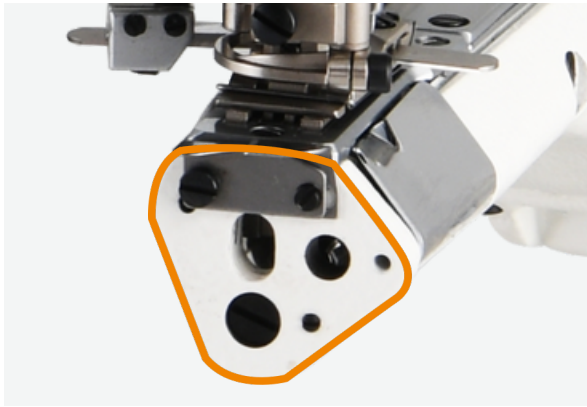

Small cylinder with 150mm circumference, which is smoother for sewing

Technical parameter:

Model	Needle	T threads	Needle qty	Needle gauge	Differential ratio	Presser foot height	Needle bar distance	Max speed (S.p.m)	Fabric cutting method	Trimming method	Volume (mm)	Weight (kg)
JK-8740C-452-01-D-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	One-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4
JK-8740C-460-01-D-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	One-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4
JK-8740C-460-01-UTL-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	One-way cutting	Pneumatic type	64.5x53.5x49.5	45.9/61.7
JK-8740C-460-01-UT-AW2S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	One-way cutting	Electric way	64.5x53.5x49.5	47.1/59.1
JK-8740C-452-02-D-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4
JK-8740C-460-02-D-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4
JK-8740C-452-02-UTL-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Pneumatic type	64.5x53.5x49.5	45.9/61.7
JK-8740C-460-02-UT-AW2S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Electric way	64.5x53.5x49.5	47.1/59.1
JK-8740C-460-02H-D-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4
JK-8740C-452-02H-UTL-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Pneumatic type	64.5x53.5x49.5	45.9/61.7
JK-8740C-460-02H-UT-AW2S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Electric way	64.5x53.5x49.5	47.1/59.1
JK-8740C-460-01-D-AW1S-T1	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	One-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4

Note: All electric presser foot lifters are standard equipment; D stands for direct drive, UT stands for electric thread trimmer, UTL stands for pneumatic thread trimmer; AW1S stands for pneumatic suction, AW2S stands for electric suction; 01 stands for one-way cut, 02 stands for two-way cut, 02H stands for double cut thick material;