

JACK

China No.1

Shanghai stock

listed



Super High Speed Automatic Overlock Machine With Pneumatic Suction Device



Website



Instagram



C6

SM Maquinaria

37 Ave 3-13 Zona 7 Col. El Rodeo

502.2315.8408



502.2315.8409

info@smmaquinaria.com

www.smmaquinaria.com


C6

Item: Super High Speed Automatic Overlock Machine with Pneumatic Suction Device
Characteristics: Full-automatic; Pneumatic device Oil-proof and durable

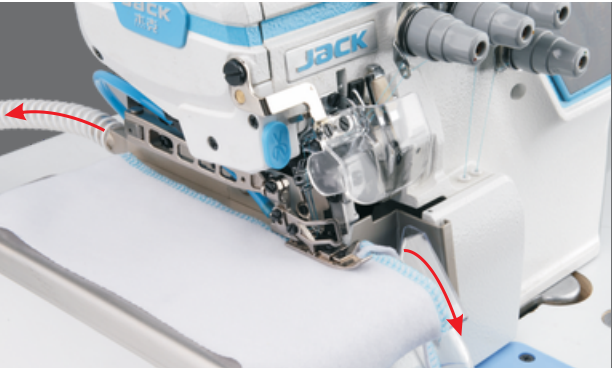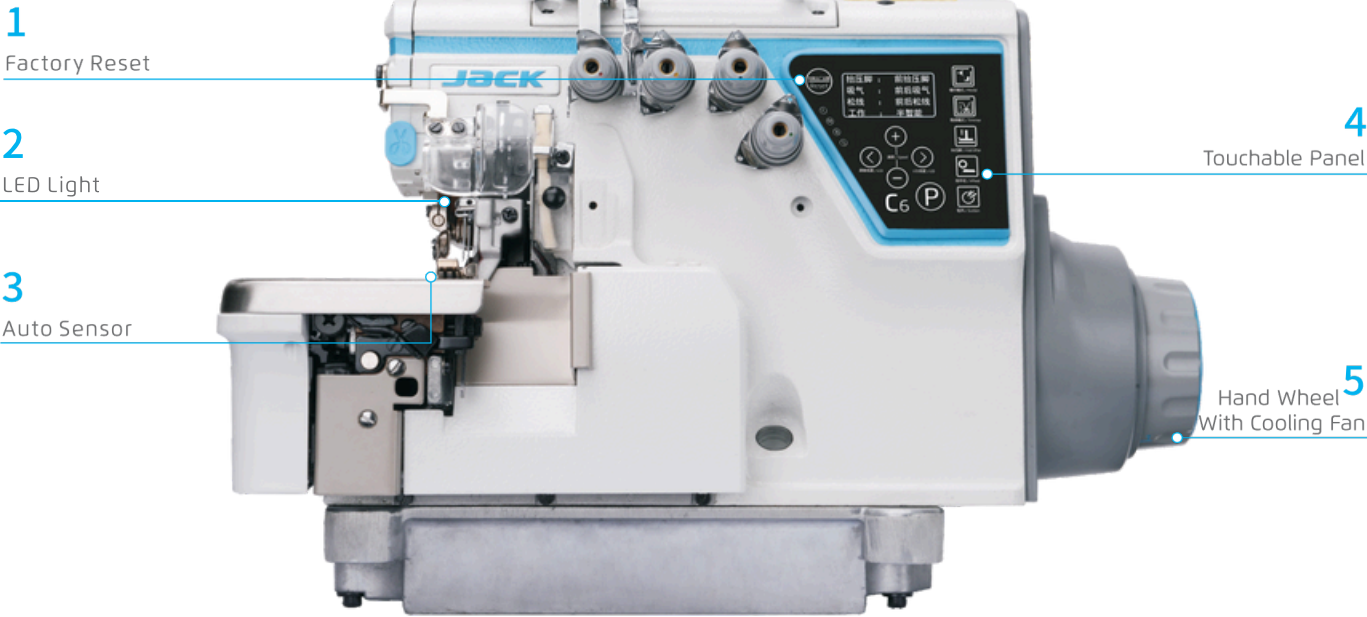


1 Start And End Suction Device, Clean Sewing

Automatic suction device makes clean sewing.

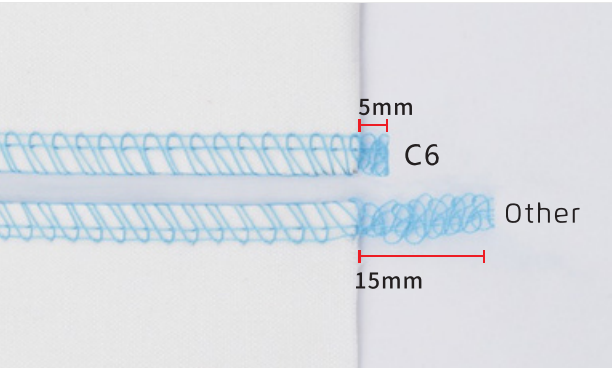

2 Short Thread Tail

Pneumatic trimming within 5mm remaining thread. No need to trim the thread tail again.

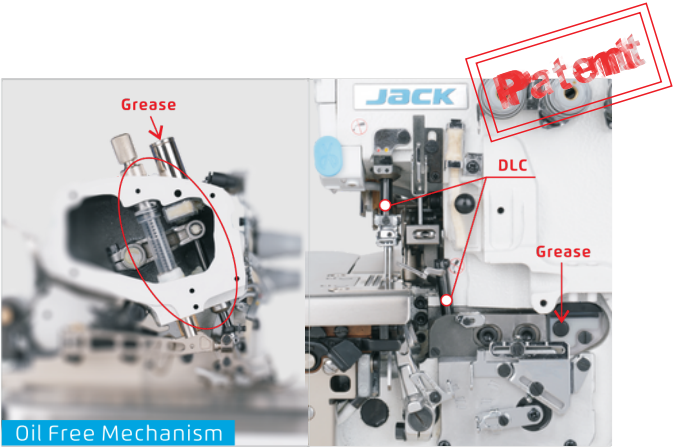


3 Oil Free And Durable

DLC needle bar and oil-proof device prevent the fabric getting polluted.




5 Touchable Panel, Fast Response

Touchable panel is sensitive, which shows reset and intelligent functions recognition perfectly.

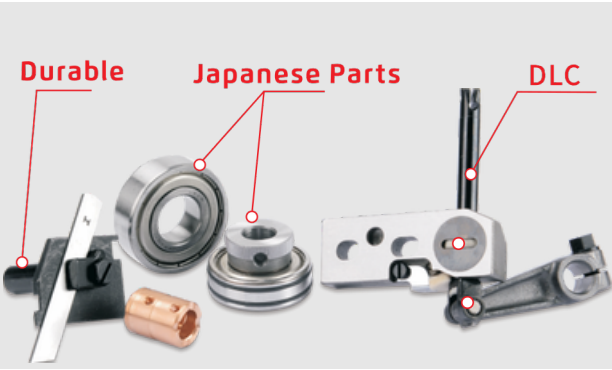

4 High Efficiency, Durable And Stable

New material and processing makes the machine more durable under high speed operation.

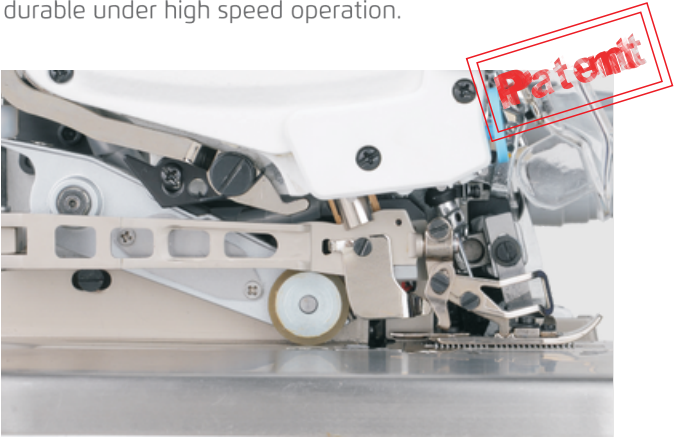

6 Puller Device (Optional)

Rear puller device contributes to high qualified sewing.

Specification

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
C6-02x250	Pocket Binding Seaming	DCx27 14#	2	4	5	5	3.8	0.7-2	3.5	7500	582x360x640	35/48
C6-3-02/233/KS	Plain Seaming	DCx27 11#	1	3	-	4	3.8	0.7-2	6	7500	582x360x640	35/48
C6-3-12/233/KS	Bottom Hemming	DCx27 11#	1	3	-	4	3.8	0.7-2	5.5	7500	582x360x640	35/48
C6-3-32R2/223/KS	Narrow Stitch Seaming	DCx27 9#	1	3	-	1.5	3.8	0.7-2	5.5	7500	582x360x640	35/48
C6-WF-3-02/213	Non-woven Material	DCx27 14#	1	3	-	4	8.5	-	5	7000	582x360x640	35/48
C6-4-M03/333/KS	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	6	7500	582x360x640	35/48
C6-4-M03/333/H/M/KS	Heavy Duty	DCx27 11#	2	4	2	4	4.6	0.7-2	6.5	7500	582x360x640	35/48
C6-MJ-4-53/233	Towel Ending	DCx27 11#	2	4	2	4	3.8	0.7-2	5.5	7500	582x360x640	35/48
C6-5-53/233	Strip Attach Seaming	DCx27 14#	2	5	3	4	3.8	0.7-2	5.5	7500	582x360x640	35/48
C6-5-03/233/KH	5x5 Stitch	DCx27 14#	2	5	5	5	3.8	0.7-2	6	7500	582x360x640	35/48
C6-5-03/333/KH	3x4 Stitch	DCx27 14#	2	5	3	4	3.8	0.7-2	6	7500	582x360x640	35/48
C6-5-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	7500	582x360x640	35/48
C6-6-03/333/KH	Plain Seaming	DCx27 11#	3	6	3x2	4	3.8	0.7-2	6	7500	582x360x640	35/48

Note: KS: vertical suction device; KH: horizontal suction device, other devices are pneumatic type; H/M: suitable for heavy and light material; PP: rear puller (optional); W: dry head(optional).