

JACK

China No.1

Shanghai stock
listed

JK-T373G

Electromechanical Integrated Button Attaching Machine

- Stepping motor, easy to operate
- Easy to learn and use, better performance
- A variety of automatic button device optional



SM Maquinaria

37 Ave 3-13 Zona 7 Col. El Rodeo

502.2315.8408

502.2315.8409

info@smmaquinaria.com

www.smmaquinaria.com

SM 
maquinaria

JK-T373G electromechanical integrated button attaching machine, german industrial design, inherits the genes of Jack family DNA, with blue strip outlook, beautiful and unique. The stepping motor controlled presser foot lifting and thread trimmer, low voice and high efficiency. The number of stitches can be switched by one key, simple and easy to learn. Suitable for sewing thin and medium-thick materials such as shirts, coats, and work clothes.



1 Stepping motor, easy to operate


Jack's patent technology of stepping motor driving presser foot lifting and thread trimmer, adopts closed-loop control system, make it precise control and convenient adjustment, with needle protection function to prevent needle breakage; the presser foot lifting sound is 3.5 decibels lighter than ordinary electromagnets, which solves the problem of electromagnet's weakness and durability, faster response and higher efficiency; the presser foot can also be lifted by hand-wheel in the power-off state, which is easy to adjust.



Presser foot and thread trimmer handwheel



Stepping motor

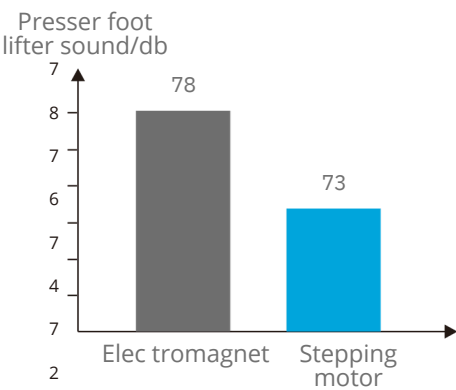


2 Easy to learn and use, better performance

The pattern and the number of stitches can be switched by one key, and the number of sewing stitches can be set freely by long pressing the stitch number key; through the parameter setting, the counting function can be added, convenient to calculate the output and s alar y



3 A variety of automatic button device optional (373GR/373GVR)

It can be adapted to various types of automatic button feeding devices (standard 16-bend large plate) to meet the special requirements of more customers for automatic buttoning.

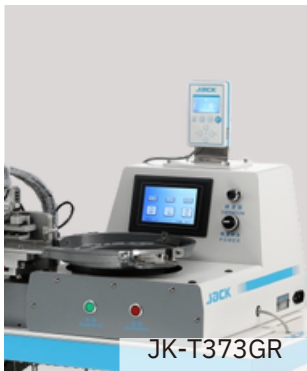

JK-T373GR



JK-T373GVR

Technical parameter

| Model | Needle No. | Needle qty | Thread | Button diameter | Button size | Automatic thread trimming | Automatic presser foot lift | Presser foot height | Max. rpm | Volume (mm) | Weight (mm) |
|------------|------------|------------|--------|-----------------|-------------------------------|---------------------------|-----------------------------|---------------------|----------|-----------------|-------------|
| JK-T373G | TQ×1 16# | 1 | 1 | 10-28 | X(2.5~6.5mm) Y(0.25~6.5mm) | ✓ | ✓ | 10 | 1500 | 630× 470× 440 | 26/32 |
| JK-T373GR | TQ×1 16# | 1 | 1 | 8-25 | X(2.5~6.5mm) Y(0.25~6.5mm) | ✓ | ✓ | 13 | 1500 | 1220× 840× 1320 | 110/159 |
| JK-T373GVR | TQ×7 16# | 1 | 1 | 10-22 | X(2.5~6.5mm) | ✓ | ✓ | 13 | 1500 | 1220× 840× 1320 | 150/200 |