

JACK

China No.1

Shanghai stock

listed



Light and Heavy Adjustable Power Saving Overlock Machine



Website



Instagram



E4S

SM Maquinaria



37 Ave 3-13 Zona 7 Col. El Rodeo

502.2315.8408


502.2315.8409

2019.10

info@smmaquinaria.com
www.smmaquinaria.com

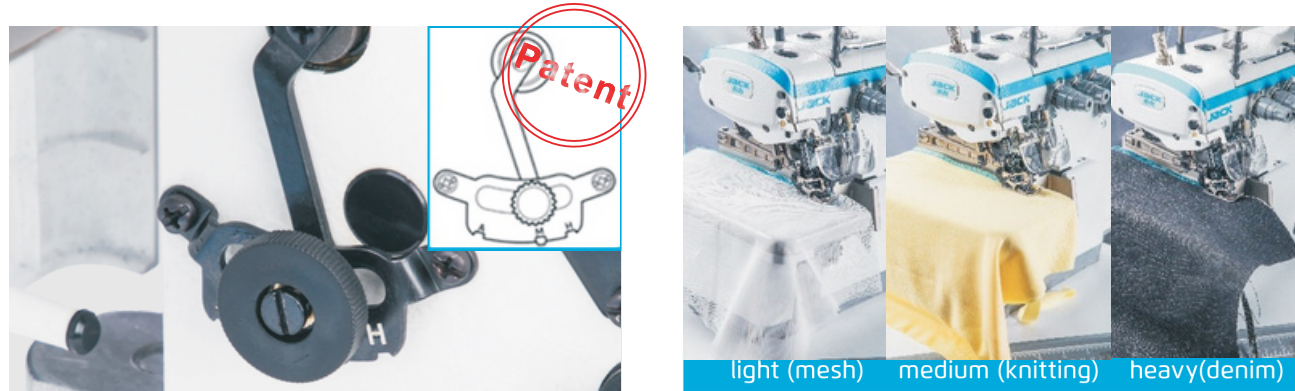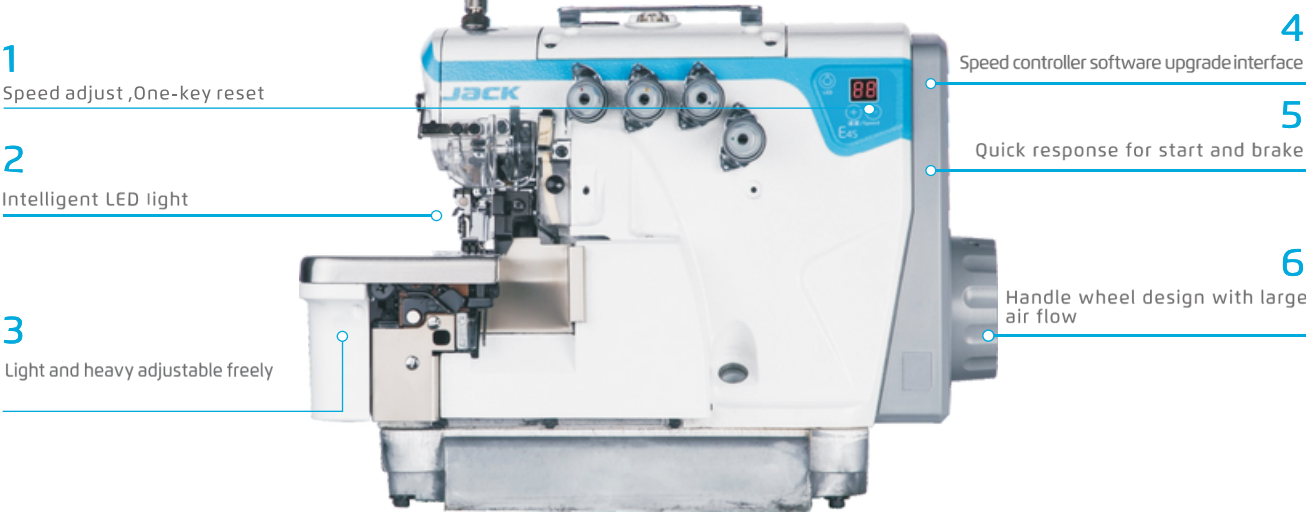

1 Light and heavy adjustable freely ,suitable for light to heavy duty
Easily convert from A-grade light material , M-grade medium material to H-grade heavy duty material.meet the demands of different changing orders like mesh, knitting and jeans,etc.

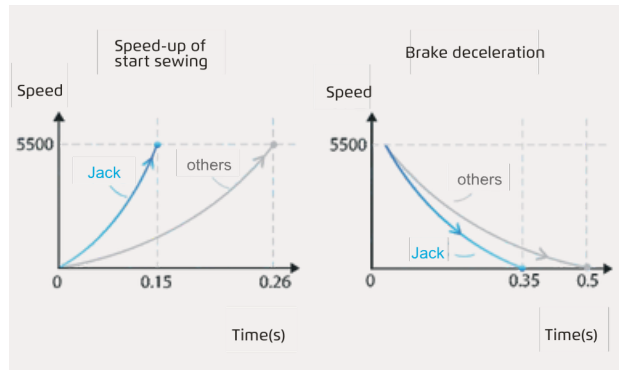

2 Super quick response for start and brake, strong and powerful
Shorter 40-50% for comprehensive start and brake response time, sewing speed experience is light and fast, increase income efficiently.



3 Needle bar avoid oil-leakage ,clean sewing
Enclosed needle bar mechanism and special oil seal for the feedbar, avoids oil leakage and ensure clean sewing.



4 One-key reset, easy learn and use
With smart panel design like one-key reset, led light adjust, easier for parameter adjusting and operator learning.

5 One Main shaft design, stable and fast
Reduce the torque of the machine and ensure more stable running, sewing speed faster and more durable.

Specification

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
E4S-2(Fabric Joint Seaming)	11#	1	2	—	6	4	0.7-2	3.5	5500	525*360*510	28/36
E4S-02x250(Pocket Binding Seaming)	14#	2	4	5	—	4	0.7-2	3.5	5500	525*360*510	28/36
E4S-3-02/233(Plain Seaming)	11#	1	3	—	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-3-82/233(Back Latching)	11#	1	3	—	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-3-32R/233(Narrow Sewing)	9#	1	3	—	1.5	4	0.7-2	5	5500	525*360*510	28/36
E4SWF-3-02/213(Non-woven Material)	14#	1	3	—	4	8.5	—	5.5	5500	525*360*510	28/36
E4S-4-M03/333(Plain Seaming)	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525*360*510	28/36
E4S-4-83/323(Back Latching)	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525*360*510	28/36
E4S-4-M03/333/H/M(Heavy Duty)	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525*360*510	28/36
E4SMJ-4-53/233(Towel Ending)	11#	2	4	2	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-53/233(Tape Attaching Seaming)	14#	2	5	3	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-02A/233(Light material)	11#	2	5	3	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-03/233(5x5 Stitch)	14#	2	5	5	5	4	0.7-2	6	5500	525*360*510	28/36
E4S-5-03/333(3x4 Stitch)	14#	2	5	3	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-M04/435(Especially For Denim)	19#	2	5	5	6	5	0.8-1.5	7	5500	525*360*510	28/36
E4S-5-A04/435(Extra Heavy Duty)	19#	2	5	5	6	5	0.8-1.5	7	5500	525*360*510	28/36
E4S-6-03/333(Plain Seaming)	11#	3	6	3 × 2	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-6-M04/435(Especially For Denim)	19#	3	6	5 × 2.5	3.5	5	0.8-1.5	7	5500	525*360*510	28/36

Note:H/M suitable for light and heavy; optional device KS (vertical suction device) and KH(horizontal suction device); machine volume:525*360*630(mm), weight 28/39(kg)